


ASSEMBLY INSTRUCTIONS

Portable assembly

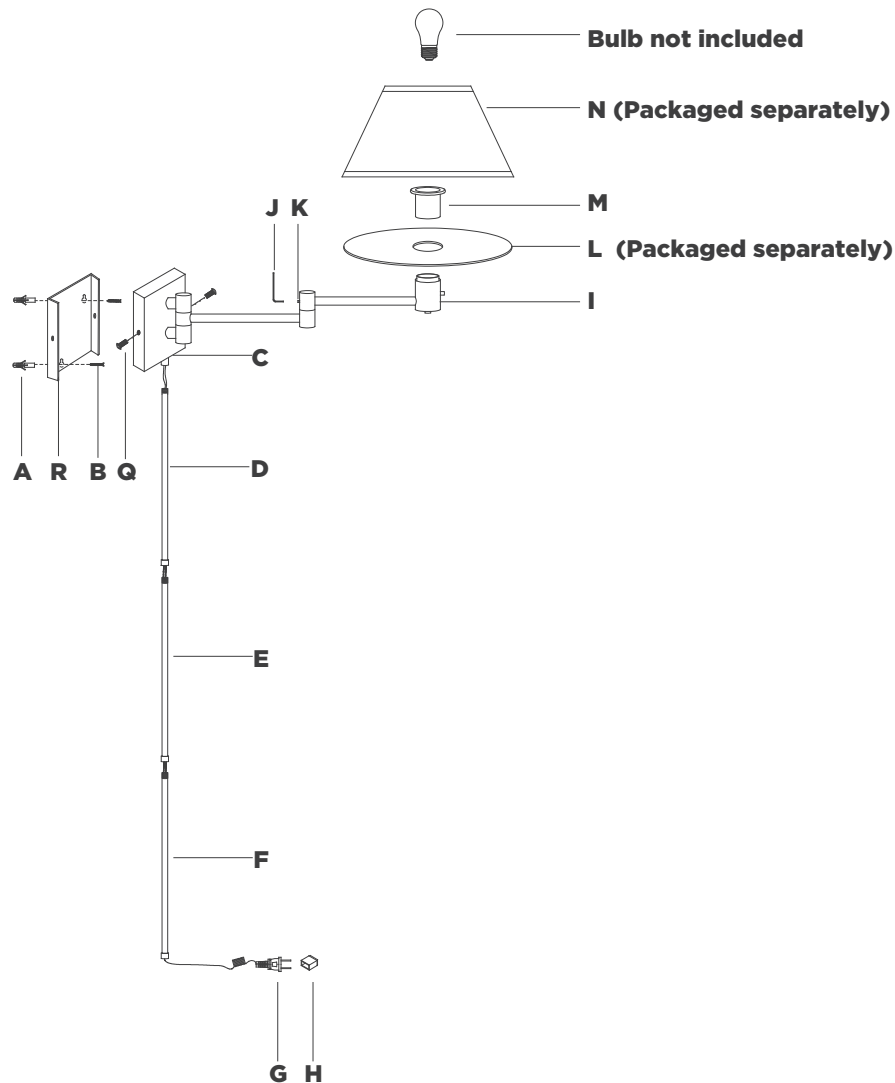

Classic Swing Arm Wall Lamp

Item # 92000D

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Hammer
Pencil	Drill	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(R)** from fixture **(C)** by removing screws **(Q)**.
3. Using portable mounting plate **(R)** as a guide, line up with the wall and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(A)** into the holes using a hammer.
5. Secure wood screws **(B)** to anchors **(A)**, leaving 1/8" of exposed thread in order to hang fixture.
6. Install portable mounting plate **(R)** to fixture **(C)** by securing with screws **(Q)**.
7. Hang fixture **(C)** to wood screws **(B)**.
8. Thread cord covers **(D)** & **(E)** & **(F)** to fixture **(C)**.
9. Remove socket ring **(M)** from socket **(I)** by pulling straight out, then install diffuser **(L)** to socket **(I)** and secure with socket ring **(M)**.
10. Place shade **(N)** onto diffuser **(L)**.
11. Install light bulb into the socket.

ASSEMBLY INSTRUCTIONS

Hardwire assembly

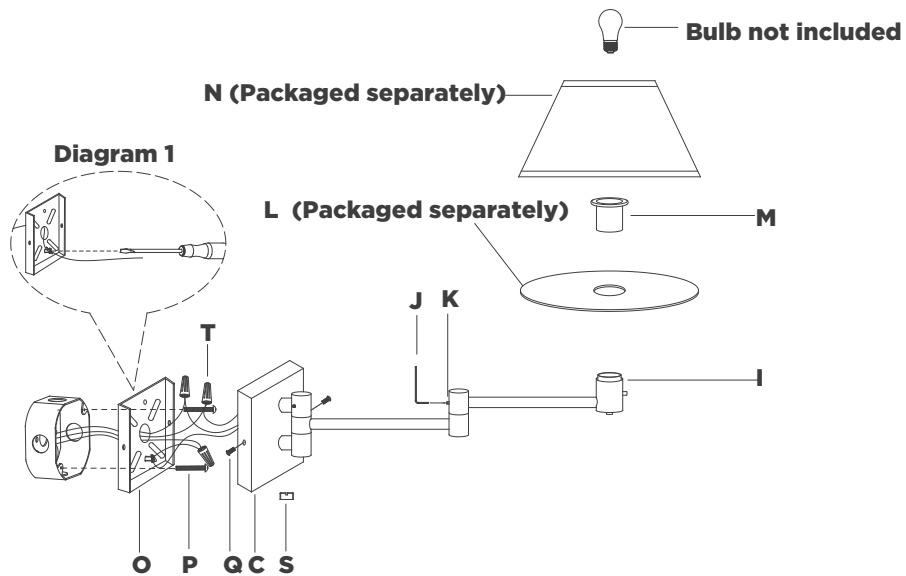

Classic Swing Arm Wall Lamp

Item # 92000D

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Remove socket ring **(M)** from socket **(I)** by pulling straight out, then install diffuser **(L)** to socket **(I)** and secure with socket ring **(M)**.
12. Place shade **(N)** onto diffuser **(L)**.
13. Install light bulb into the socket.
14. Adjust fixture arm to desired position.

NOTE: If adjustment elbow is too loose or tight, use provided wrench **(J)** to loosen or tighten set screw **(K)** located on back of elbow.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.