


ASSEMBLY INSTRUCTIONS

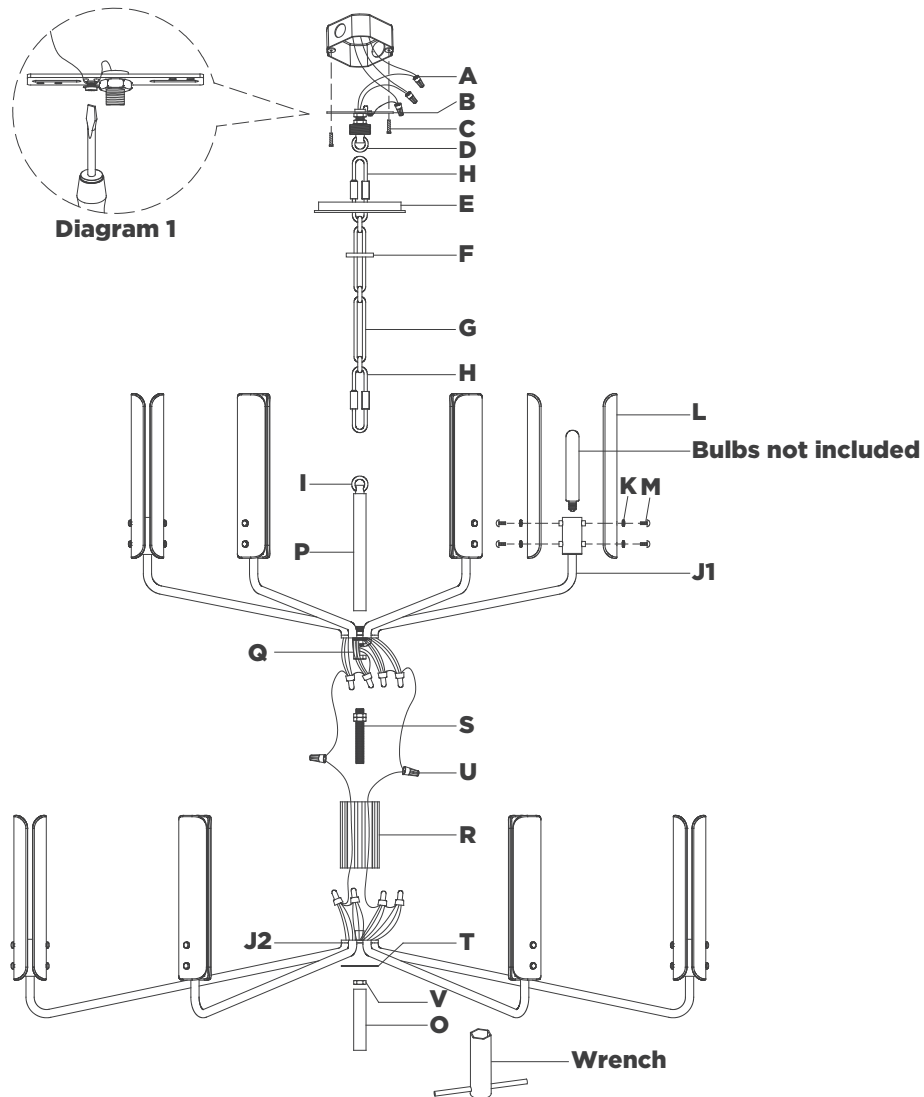

Casoria Large Two-Tier Chandelier


Item # ARN5484

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Feed fixture wire and ground wire through tube **(P)** and connect tube **(P)** to fixture body **(J1)**.
12. Thread finial **(O)** to the bottom of fixture body **(J2)**.
13. Determine desired overall length, and amount of chain **(G)** needed. Shorten chain using chain pliers. (Keep extra chain)
14. Attach chain **(G)** to collar loop **(D)** and to fixture loop **(I)** using quick links **(H)**. Secure quick links **(H)**.
15. Thread fixture wire and ground wire through chain **(G)**.
NOTE: When you reach the collar loop **(D)**, ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.
16. Separate two sides of molded wire, and strip insulation on each 5/8".
17. Loosen collar ring **(F)** and let canopy **(E)** slip down chain **(G)** carefully.
18. Twist all fixture wires together, and slip through center hole of collar loop **(D)**.
NOTE: Untwist wires and separate to prepare for connection.
19. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(A)**.
NOTE: It is imperative that the fixture is grounded.

ASSEMBLY INSTRUCTIONS

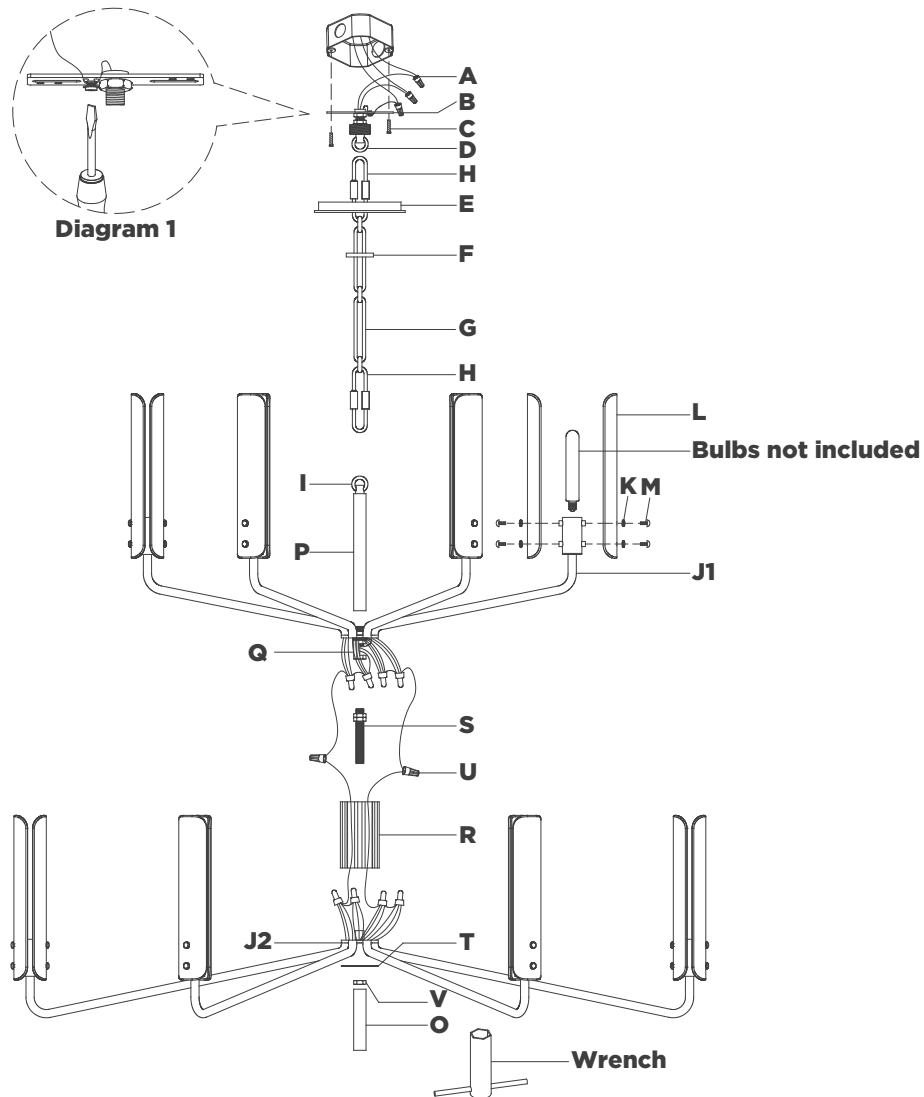

Casoria Large Two-Tier Chandelier

Item # ARN5484

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

20. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut **(A)**.
21. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
22. Make sure all wire connections are tight, then carefully tuck into the junction box.
23. Install canopy **(E)** to collar loop **(D)** and secure with collar ring **(F)**.
24. Install light bulbs into the sockets.
25. Attach glass panels **(L)** and rubber washers **(K)** to socket cup and secure with screws **(M)**.
NOTE: Do not overtighten otherwise glass could become damaged.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.